




Linx Plus Series[®] 8900

Color Contrast Continuous Inkjet Printing

Inkjet
Technology by

LINX

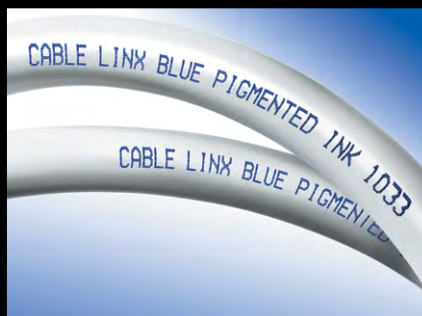


Features and Benefits:



- **Enhanced mix cycle** combined with self-cleaning printheads ensures consistent, high-quality prints
- **Industry-leading extended service intervals** of up to 6,000 hours or 12 months maximizes printer availability
- **Simple self-service design** guides operators through service module changes via on-screen instructions, no pump or ink system part changes required
- **Achieve a wide variety of high-contrast print messages**, including data matrix and 2D barcodes, on light and dark surfaces using black, blue, and yellow soft-pigmented inks and easy message creation

Dimensions:

Front Elevation



Side Elevation



Printhead



Printer Specifications:

Printhead with 2M Conduit, Standard	MK11 Midi Plus
Printhead/Conduit Options	2M, 4M, 6M
Max Lines of Print	3 - 5
Character Height Range	0.083" - 0.791"
Max Speed:	
Standard Speed Single Line	557 fpm
High Performance Single Line	1791 fpm
Ink Range	Soft Pigment Based
Automatic Date Codes,	
Sequential Numbering	Yes
Timed Messages	Yes
Graphics/Logo Printing	Yes, imported as bitmap files using USB port
Barcodes	ITF 2of5, Code 39, Code 128, EAN 13, EAN 8, UPCA, Pharmacode, Data Matrix, QR Code
Memory Capacity (# of Messages)	1000 using internal printer, more can be stored using USB device
Ingress Protection Rating	IP55
Base and Enclosure	Stainless Steel
Operating Temperature Range	41-113°F
Humidity Range	90% Max
Power Supply	100-230V 50/60 Hz
Power Consumption	38W (typical when printing)
Weight	53 lbs
Regulatory Approvals	GS, CE, EAC, NRTL, FCC

Connections / Interfacing Specifications:

Product Detector	Yes
RS232 Port	Optional
Dual alarm output	
(Volt free and 24v option)	Yes
Parallel I/O Option	Yes
USB and Ethernet	Yes
External single-state	
(alarm output (24v))	Yes
Shaft Encoder/	
Second Product Detector	Yes
Volt-Free Contact Alarm Connection	Yes

Distributor Information:

